


*Catalog of*

# REPLACEMENT PARTS

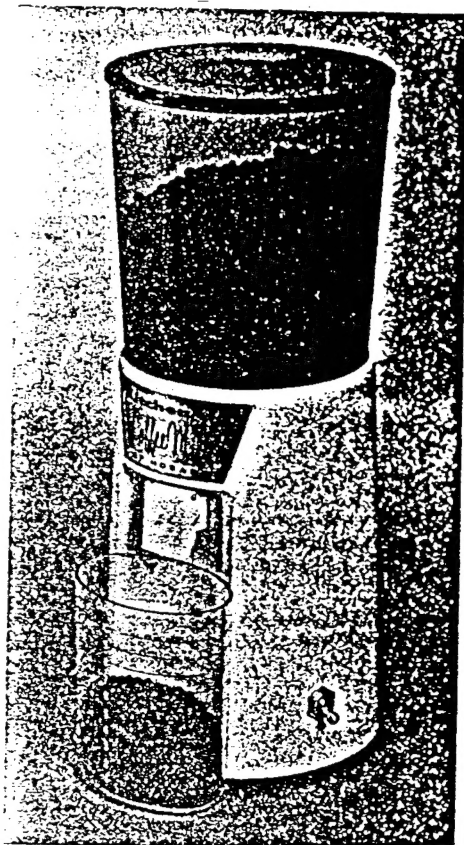

**KitchenAid®**

COFFEE MILL

MODEL KCM

ML-34068

ML-34124


KITCHENAID DIVISION



TROY, OHIO 45374

FORM 12105B (Rev. 12-81) (Supds. F. 12105A)

4177068

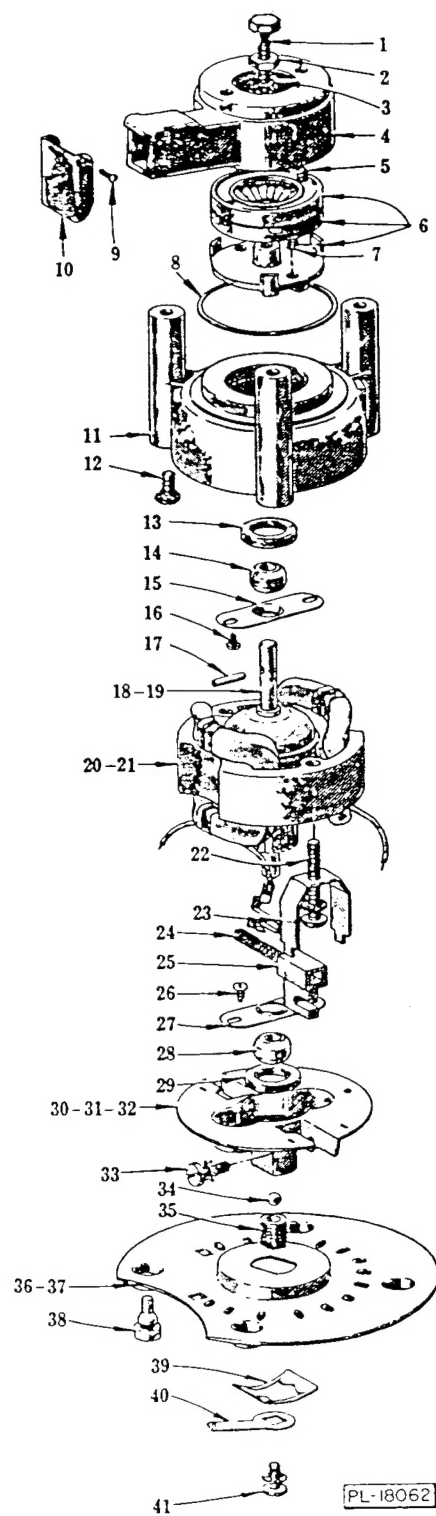


PL-18062

MOTOR AND BURR HOUSING UNIT

## MOTOR AND BURR HOUSING UNIT

ILLUS. PL-18062	PART NO.	NAME OF PART	AMT.
1	SC-112-73	Mach. Screw - #10-24 x 1-1/4" Hex Hd	1
2	NS-9-24	Mach. Nut - #10-24 Hex	1
3	WL-7-12	Lock Washer - #10 Ext. Shakeproof	1
4	E-75986-2	Housing - Burr (White)	1
5	SC-13-75	Mach. Screw - #6-32 x 3/8" Phil. Flat Hd	2
*6	B-72218-4	Burr Flange & Burr Assy. (Incls. items #1, 2, 3 & 7)	1
7	SC-20-20	Mach. Screw - #6-32 x 5/16" Phil. Flat Hd	2
8	B-75755	Gasket - Bearing Bracket	1
9	SD-5-45	Drive Screw - #0 x 3/8" Rd. Hd., Type U	2
10	C-17654-2	Cover - Outlet (White)	1
11	E-75653	Bracket - Motor Bearing	1
12	SA-3-28	Screw & L.W. Assy. - #10-32 x 3/8" Rd. Hd., Ext L.W.	3
13	B-17649	Packing	1
14	C-17647	Bearing	1
15	C-17648	Retainer - Bearing	1
16	SD-33-1	Self-Tapping Screw - #4-40 x 1/4" Phil. Pan Hd., Type T	2
17	B-17052	Pin - Burr Flange Drive	1
18	C-110038-1	Armature Assy. 115 V. (D.C. to 60 Hz. A.C.)	1
19	C-110038-2	Armature Assy. 230 V. (D.C. to 60 Hz. A.C.)	1
20	C-109946-1	Stator Assy. 115 V. (D.C. to 60 Hz. A.C.)	1
21	C-109946-2	Stator Assy. 230 V. (D.C. to 60 Hz. A.C.)	1
22	SA-3-24	Screw & L.W. Assy. - #10-24 x 1-1/8" Slot. Rd. Hd., Ext. L.W.	2
23	C-75777	Bracket - Bearing Support	2
*24	B-63503	Brush & Spring Assy	2
*25	B-72631	Housing - Brush Holder	2
26	SD-33-1	Self-Tapping Screw - #4-40 x 1/4" Phil. Pan Hd., Type T	2
27	C-17648	Retainer - Bearing	1
28	C-17647	Bearing	1
29	B-17649	Packing	1
30	C-75802-1	Lower Bearing Support Assy. 115 V. (D.C. to 60 Hz. A.C.)	1
31	C-75802-2	Lower Bearing Support Assy. 230 V. (D.C. to 60 Hz. A.C.)	1
32	SD-7-23	Self-Tapping Screw - #6 x 1/4" Rd. Hd., Type B (230 V. ONLY) (For ground wire on cord to Lower Bearing Support Assy. (Item #31))	1
33	SA-8-6	Screw & L.W. Assy. - #8 x 1/2" Bind. Hd., Ext. L.W., Type B	2
34	BA-2-6	Ball - 3/16" Dia	1
35	B-75686	Screw - Burr Adjusting	1
36	E-113509-1	Plate - Bottom (115 V.)	1
37	E-113509-3	Plate - Bottom (230 V.)	1
38	B-75711	Foot	4
39	B-75834	Speed Nut	1
40	C-75689	Arm - Indicator	1
41	SA-9-4	Screw & L.W. Assy. - #6-32 x 3/16" Pan Hd., Ext.-Int. L.W.	1
	C-75812-1	Motor Assy. 115 V. (D.C. to 60 Hz. A.C.) (Incls. items #11, 13 thru 18, 20, 22 thru 30 & 33 thru 35)	1
	C-75812-2	Motor Assy. 230 V. (D.C. to 60 Hz. A.C.) (Incls. items #11, 13 thru 17, 19, 21 thru 29, 31 & 33 thru 35)	1

\*Flange and Burrs are machined and Balanced as an Assembly and therefore are furnished in pairs with burr flange ONLY.

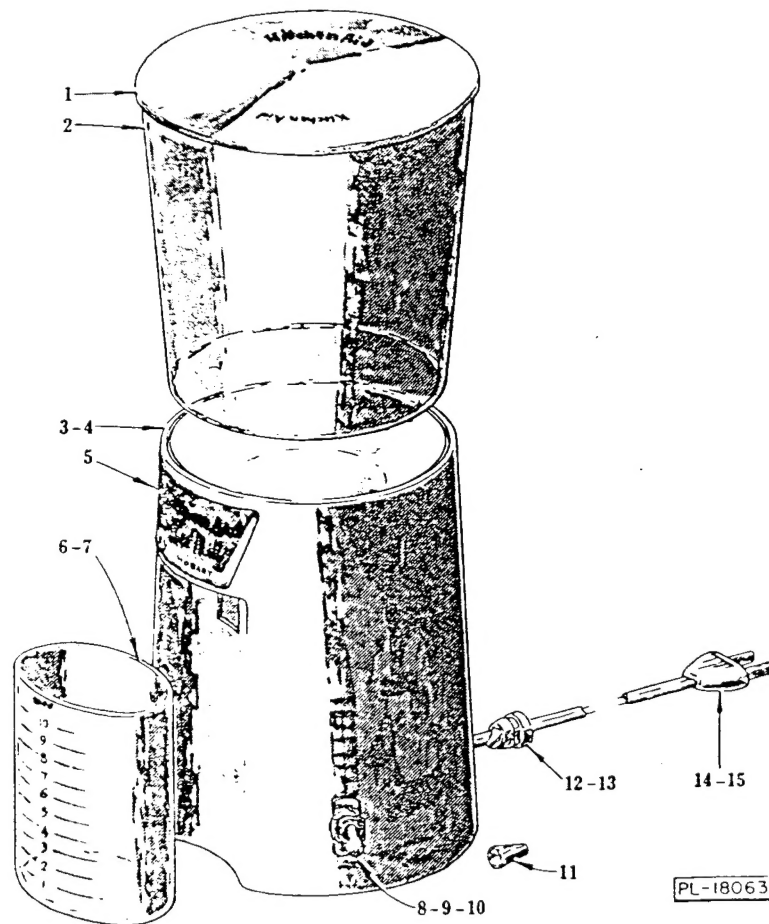

HOPPER AND BASE UNIT

ILLUS. PL-18063	PART NO.	NAME OF PART	AMT.
	1	C-75702-1 Lid - Hopper	1
	2	D-75652 Hopper	1
	3	E-75683-1 Housing - Base & Motor (115 V.) (White)	1
	4	C-78510-1 Housing - Base & Motor (230 V.) (White)	1
	5	B-113697 Medallion - Housing	1
	6	D-75706-1 Cup - Measuring (Graduated)	1
	7	D-75706-2 Cup - Measuring (Blank)	1
	8	B-87711-114-1 Switch - Toggle (Incls. Nuts)	1
	9	WL-19-7 Lock Washer - 7/16" Int. Shakeproof	1
	10	B-240923 Plate - Indicator	1
	11	FE-6-17 Wire Connector (=71-B Ideal)	3
	12	FE-8-15 Strain Relief (For item #14)	1
	13	FE-8-18 Strain Relief (For item #15)	1
	14	C-241027 Cord & Plug (2 Cond. Under 125 V.)	1
	15	B-78508 Cord - Export	1